



BSC paints

GIVE NEW LIFE TO ALL WOOD SURFACES

PU INTERIOR | PU EXTERIOR | MELAMINE | ZINC PRIMER | NC PAINT

THE BRAND OF INDIA
AN ISO 9001-2008 CO.



SUPER LUXURY WOOD COATING PU INTERIOR

BSC Paints Super Luxury Wood Coating PU Interior is acrylic based clear coating, which offers excellent stain resistance, better hardness and long-lasting durability. It also has a gloss and matte finish for multiple surfaces. It's tough film ensures no scratches and stains on the wood.

FEATURES

TOUGH FILM

It's superior film hardness making the product more durable.

NON YELLOWING

It's non yellowing feature making it retain gloss for longer.

CRACK RESISTANT

It has a strong yet flexible film, hence, it resists cracking even on curved surfaces.

ANTI FUNGAL

It offers high resistance to any algal or fungal attack.

PRODUCT BENEFITS

DURABLE




VERY HIGH
INTERIOR
DURABILITY

FINISHES

MATT
FINISH

GLOSS
FINISH

AVAILABLE COLORS

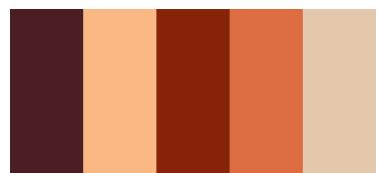

AVAILABLE PACKS



DRY TIME



POST PAINTING CARE

For removing stains on tiles and metal surfaces, apply NC Thinner on the surface and wipe clean.

If stains are difficult to remove, scrapping can be done after applying NC thinner on the stained area.

Precautions need to be taken while spraying/ brushing, like masking of adjoining areas with suitable material, as the stains may be difficult to remove if present on wood or coated wooden and wall surfaces.

HOW TO CHOOSE COLORS



HOW TO APPLY

PRE PAINTING STEPS

SANDING: Sand the wooden surface along the grains using sand paper no. 180, and then 320 or 400. Wipe surface to clean off loose dust particles.

INSULATING: (Optional) Apply 1-2 coats of Insulator to insulate from oil & resin from the wood, also it reduces absorption of a paint material on Veneer.

DENT FILLING: If the surface has dents, apply WoodTech Filler with a putty knife over the dented area.

STAINING: To colour, apply Super Luxury Wood Coating Interiors by ragging or spraying. Allow to dry for 30 to 120 minutes.

PAINT APPLICATION PROCESS

CODE	MIXING RATION OF BASE	THINNER	DILUTION%	APPLICATION VISCOSITY	RECORDING PERIOD
CODE	80:20	PU THINNER (1532/ 5442)	SPRAY 15 - 30	SPRAY 15 - 20 SECS	8 - 12 HOURS (SHOULD NOT EXCEED 72 HOURS)
SAND THE SURFACE WITH SAND PAPER 320 OR 400 AND WIPE CLEAN					
CODE	80:20	PU THINNER (1532/ 5442)	SPRAY 15 - 30	SPRAY 15 - 20 SECS	8 - 12 HOURS (SHOULD NOT EXCEED 72 HOURS)
SAND THE SURFACE WITH SAND PAPER 320 OR 400 AND WIPE CLEAN (APPLY 3RD COAT IF REQUIRED BEFORE TOP COAT APPLICATION, SAND WITH SAND PAPER NO. 320 / 400 AND WIPE CLEAN)					
CODE	80:20	PU THINNER (1532/ 5442)	SPRAY 15 - 30	SPRAY 15 - 20 SECS	8 - 12 HOURS (SHOULD NOT EXCEED 72 HOURS)
SAND THE SURFACE WITH SAND PAPER 320 OR 400 AND WIPE CLEAN					
CODE	80:20	PU THINNER (1532/ 5442)	SPRAY 15 - 30	SPRAY 15 - 20 SECS	8 - 12 HOURS (SHOULD NOT EXCEED 72 HOURS)
(APPLY THIRD COAT IF REQUIRED AFTER SANDING WITH SAND PAPER NO. 320 / 400 AND WIPE CLEAN)					

SUPER LUXURY WOOD COATING PU EXTERIOR

BSC Paints Super Luxury Wood Coating PU Exterior is acrylic based clear coating, which offers excellent stain resistance, better hardness and long-lasting durability. It also has a gloss and matte finish for multiple surfaces. Its tough film ensures no scratches and stains on the wood.



FEATURES

EXTERIOR DURABILITY

It has UV guards, which make the product an excellent product for exteriors

RESISTS CRACKING

It has a strong yet flexible film, hence, it resists cracking even on curved surfaces.

SUPERIOR RESISTANCE

for Exterior it has good scratch, stain and heat resistance.

HARDNESS

It has superior film hardness making the product more durable.

PRODUCT BENEFITS

DURABLE




HIGH EXTERIOR DURABILITY

FINISHES

MATT FINISH

GLOSS FINISH

AVAILABLE COLORS

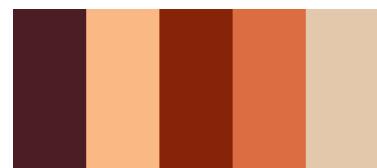

AVAILABLE PACKS



DRY TIME



POST PAINTING CARE

For removing stains on tiles and metal surfaces, apply NC Thinner on the surface and wipe clean.

If stains are difficult to remove, scrapping can be done after applying NC thinner on the stained area.

Precautions need to be taken while spraying/ brushing, like masking of adjoining areas with suitable material, as the stains may be difficult to remove if present on wood or coated wooden and wall surfaces.

HOW TO CHOOSE COLORS



HOW TO APPLY

PRE PAINTING STEPS

SANDING: Sand the wooden surface along the grains using sand paper no. 180, and then 320 or 400. Wipe surface to clean off loose dust particles.

INSULATING: (Optional) Apply 1-2 coats of Insulator to insulate from oil & resin from the wood, also it reduces absorption of a paint material on Veneer.

DENT FILLING: If the surface has dents, apply WoodTech Filler with a putty knife over the dented area.

STAINING: To colour, apply Super Luxury Wood Coating Interiors by ragging or spraying. Allow to dry for 30 to 120 minutes.

PAINT APPLICATION PROCESS

CODE	MIXING RATION OF BASE	THINNER	DILUTION%	APPLICATION VISCOSITY	RECORDING PERIOD
CODE	80:20	PU THINNER (1532/ 5442)	SPRAY 15 - 30	SPRAY 15 - 20 SECS	8 - 12 HOURS (SHOULD NOT EXCEED 72 HOURS)
SAND THE SURFACE WITH SAND PAPER 320 OR 400 AND WIPE CLEAN					
CODE	80:20	PU THINNER (1532/ 5442)	SPRAY 15 - 30	SPRAY 15 - 20 SECS	8 - 12 HOURS (SHOULD NOT EXCEED 72 HOURS)
SAND THE SURFACE WITH SAND PAPER 320 OR 400 AND WIPE CLEAN (APPLY 3RD COAT IF REQUIRED BEFORE TOP COAT APPLICATION, SAND WITH SAND PAPER NO. 320 / 400 AND WIPE CLEAN)					
CODE	80:20	PU THINNER (1532/ 5442)	SPRAY 15 - 30	SPRAY 15 - 20 SECS	8 - 12 HOURS (SHOULD NOT EXCEED 72 HOURS)
SAND THE SURFACE WITH SAND PAPER 320 OR 400 AND WIPE CLEAN					
CODE	80:20	PU THINNER (1532/ 5442)	SPRAY 15 - 30	SPRAY 15 - 20 SECS	8 - 12 HOURS (SHOULD NOT EXCEED 72 HOURS)
(APPLY THIRD COAT IF REQUIRED AFTER SANDING WITH SAND PAPER NO. 320 / 400 AND WIPE CLEAN)					